


USB Series Connectors

USB SERIES CONNECTORS TYPE (DIP / SMD)

Key Specifications/Special Features:

300 series: A type, R/A

- 302 series: A type, stack, R/A
- 303 series: A type, straight PCB
- 305 series: B type, R/A
- Materials:
 - Insulator: PBT, UL 94V-0
 - Contacts: phosphor bronze or equivalent
 - Shell: brass
- Specifications:
 - Current rating: 1A
 - Insulator resistance: 5000Mohms min.
500VDC for 1 minute
 - Contact resistance: 20mohm max.
 - Dielectric withstanding: AC 500V for 1
minute
 - Operating temperature: -40°C to +105°C
 - Insulator material: polyester, UL 94V-0,
standard P.B.T

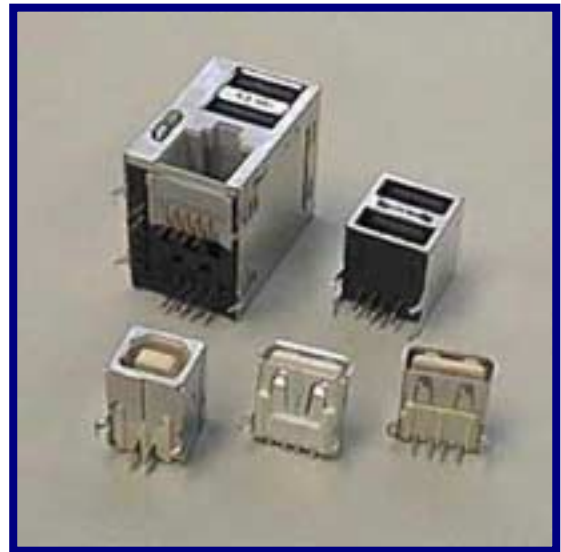

For ordering information please consult our sales department